


FEATURES

- 600 VAC / 1500 VDC analog optical isolation
- Selectable for voltage or current input and output
- Factory calibrated
- On-board 24 VAC Isolation Transformer
- LED indicators for incoming and outgoing power supply
- Mounts in Snap Track or ENC1 Enclosure

APPLICATIONS

- Ground loop isolation
- Variable frequency motor drive isolation
- Grounded electric actuator isolation
- Fluorescent light dimmer isolation
- General analog signal input and output isolation

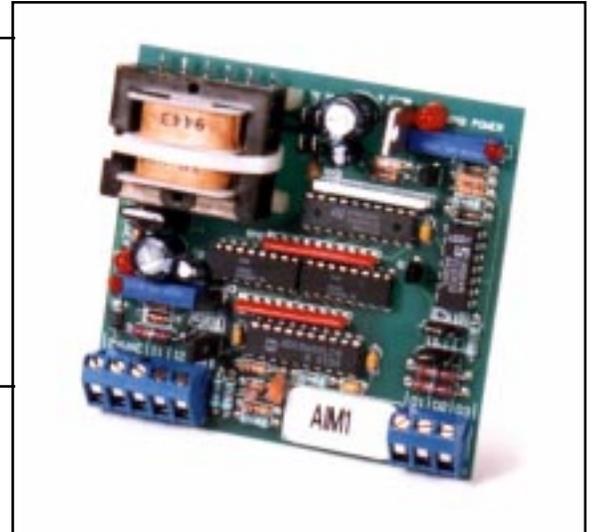

PRODUCT DESCRIPTION

The AIM1 optically isolates an analog voltage or current input signal from its corresponding output signal.

The AIM1 is factory calibrated and the output is linear and proportional (1:1 ratio) to the input signal. The AIM1 will accept a 0 to 5 volt, 0 to 10 volt or 0 to 20 mA span input, and output one of those same ranges.

The AIM1 can be wired for a voltage or current input signal. The output can be wired for a voltage or current (sink or source) signal.

The AIM1 requires one external 24 VAC transformer for power. It has an on-board 24 VAC isolation transformer to supply the isolated output. The unit has LED status indicators for both power supplies.

SPECIFICATIONS

Electrical Requirements

Power Supply

Supply Voltage	24 VAC +/-10%
Supply Current	100 mA maximum

Input

Signal Input Range/Impedance	0 to 5 VDC/20,000 ohms
	0 to 10 VDC/20,000 ohms
	0 to 20 mA/250 ohms

Output

Output Signal /Impedance	0 to 5 VDC/5000 ohms
	0 to 10 VDC/5000 ohms
	0 to 20 mA (source or sink)/500 ohms

Accuracy

Voltage Modes	+/- 1%
Current Source Modes	+/- 2%
Current Sink Modes	+/- 1%
Linearity	+/- 1%

Mechanical Requirements

Connections

Wire Size	Up to one 14 gauge maximum
Terminal Type	45° Captive screw, box clamp design in nickel plated copper alloy
Dimensions	3.25" L x 3.425" W x 1.5" H
Weight	8 oz.
Mounting	Furnished with 3.425" length of 3.25" wide snaptrack

Environmental Requirements

Operating Temperature	32 to 120 deg F
Storage Temperature	-20 to 150 deg F
Operating Humidity	10% to 95% non-condensing

Specifications may change without notice to improve product performance or functionality.